


Master Link, MFX

Oversized, for 1- and 2-leg slings. Designed for use with CL, CLD, CG and CGD.

| Art. no. | Code | WLL tonnes (SF 5:1) | | For chain 1-leg | For chain 2-leg | L | E | D | Weight kgs |
|----------|-------------|---------------------|-------------------------------|--------------------|--------------------|-----|-----|----|---------------|
| | | EN 1677-4 | A-952/A952M AS 3775.2-2014 | | | | | | |
| Z100550 | MFX-108-10 | 4.25 | 5.2 | 8, 10 | 8 | 340 | 180 | 25 | 3.7 |
| Z100551 | MFX-1310-10 | 7.5 | 8.0 | 13 | 10 | 340 | 180 | 28 | 4.7 |
| Z100552 | MFX-1613-10 | 11.2 | 13.6 | 16 | 13 | 340 | 180 | 34 | 7.1 |
| Z101125 | MFX-2016-10 | 16.0 | 20.6 | 20 | 16 | 340 | 180 | 40 | 9.6 |

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M, AS 3775:2014 and AS 3776:2015.




2

Master Grab MG

"All-in-one" compact top link.

| Art. no. | Code | WLL tonnes* | L | A | E | D | Weight kgs |
|----------|----------|----------------|-----|-----|-----|----|---------------|
| B14710 | MG-6-10 | 1.5 | 145 | 88 | 60 | 15 | 0.5 |
| B14711 | MG-8-10 | 2.6 | 171 | 92 | 60 | 18 | 0.9 |
| B14712 | MG-10-10 | 4.0 | 211 | 113 | 75 | 22 | 1.8 |
| B14713 | MG-13-10 | 6.8 | 261 | 138 | 90 | 26 | 3.5 |
| B14714 | MG-16-10 | 10.3 | 311 | 157 | 105 | 31 | 6.1 |

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M and AS 3776:2015.

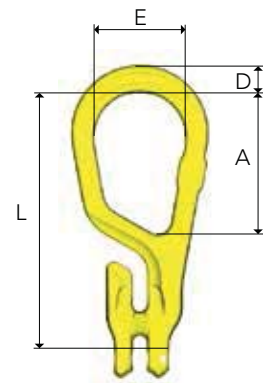


Master Grab Duo MGD

"All-in-one" compact top link for 2-leg slings.

| Art. no. | Code | WLL tonnes* | L | A | E | D | Weight kgs |
|----------|-----------|----------------|-----|-----|-----|----|---------------|
| B14700 | MGD-6-10 | 2.1 | 144 | 90 | 60 | 17 | 0.7 |
| B14701 | MGD-8-10 | 3.5 | 171 | 100 | 75 | 21 | 1.3 |
| B14702 | MGD-10-10 | 5.6 | 211 | 124 | 90 | 24 | 2.3 |
| B14703 | MGD-13-10 | 9.5 | 262 | 149 | 105 | 31 | 5.2 |
| B14704 | MGD-16-10 | 14.0 | 310 | 175 | 120 | 35 | 7.9 |

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M and AS 3776:2015.

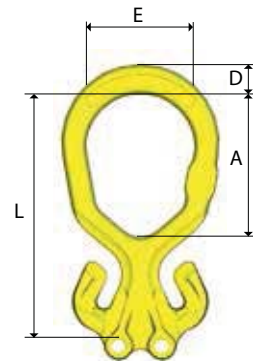

Coupling Link G

For use with master link and eye hook.

| Art. no. | Code | WLL tonnes* | L | B | F | A | C | Weight kgs |
|----------|---------|----------------|-----|----|----|----|----|---------------|
| Z100821 | G-6-10 | 1.5 | 45 | 15 | 7 | 8 | 16 | 0.1 |
| Z101358 | G-7-10 | 2.0 | 56 | 18 | 9 | 11 | 22 | 0.2 |
| Z100822 | G-8-10 | 2.6 | 56 | 18 | 9 | 11 | 22 | 0.2 |
| Z100823 | G-10-10 | 4.0 | 68 | 25 | 12 | 13 | 26 | 0.3 |
| Z100824 | G-13-10 | 6.8 | 89 | 29 | 15 | 17 | 33 | 0.7 |
| Z100825 | G-16-10 | 10.3 | 106 | 36 | 19 | 20 | 40 | 1.4 |
| Z101119 | G-20-10 | 16.0 | 125 | 43 | 23 | 26 | 44 | 2.2 |
| Z101339 | G-22-10 | 20.0 | 152 | 50 | 26 | 28 | 59 | 3.6 |
| Z101365 | G-26-10 | 27.3 | 161 | 58 | 32 | 34 | 61 | 5.7 |
| Z101666 | G-32-10 | 40.0 | 200 | 70 | 38 | 40 | 77 | 9.5 |

Fulfills requirements in: EN 1677:2008 (WLL +25%), ASTM A952/A952M and AS 3776:2015.

