
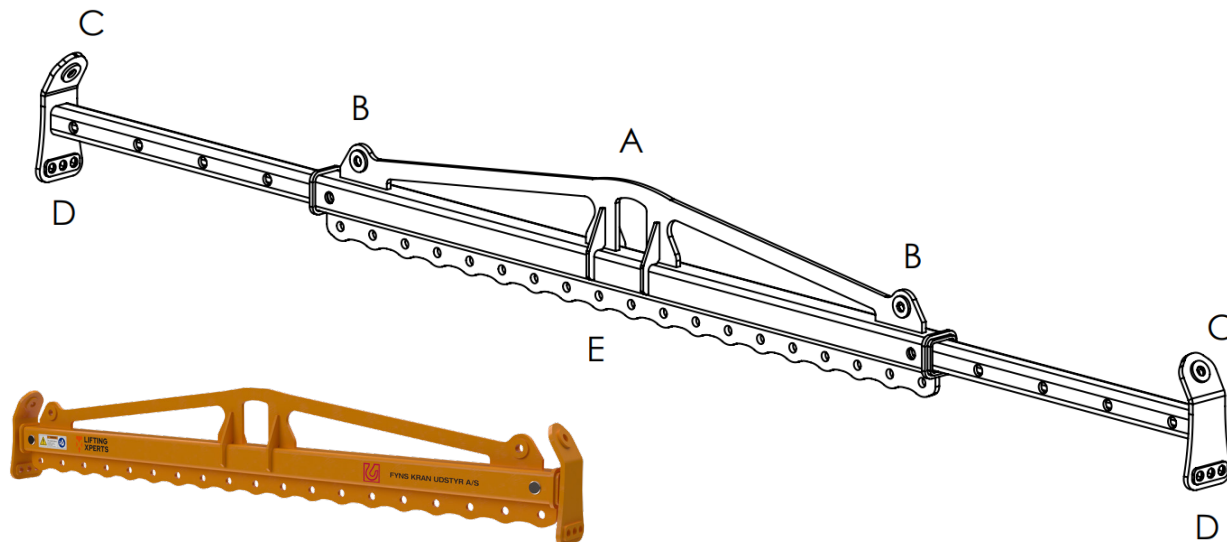


**LX S15 - WLL 8/6T**

Løfteøje - Top	Løfteøje - Bund	Spredningsvinkel	Længde (mm)	WLL (kg)
A	D	-	2500	8.000
A	D	-	3000	7.000
A	D	-	3500	6.000
A	D	-	4000	4.000
A	D	-	4500	2.000
A	E	-	0-2500	8.000
B/B	D	Max. Spredningsvinkel 60°!	2500	8.000
B/B	D	Max. Spredningsvinkel 60°!	3000	
B/B	D	Max. Spredningsvinkel 60°!	3500	6.000
B/B	D	Max. Spredningsvinkel 60°!	4000	
B/B	D	Max. Spredningsvinkel 60°!	4500	2.000
B/B	E	Max. Spredningsvinkel 60°!	0-2500	8.000
C	D	Max. Spredningsvinkel 60°!	2500	8.000
C	D	Max. Spredningsvinkel 60°!	3000	8.000
C	D	Max. Spredningsvinkel 60°!	3500	8.000
C	D	Max. Spredningsvinkel 60°!	4000	6.000
C	D	Max. Spredningsvinkel 60°!	4500	6.000
C	E	N/A	N/A	N/A

Valgbare påsvejsede gravemaskinekroge har samme WLL som løfteåget.

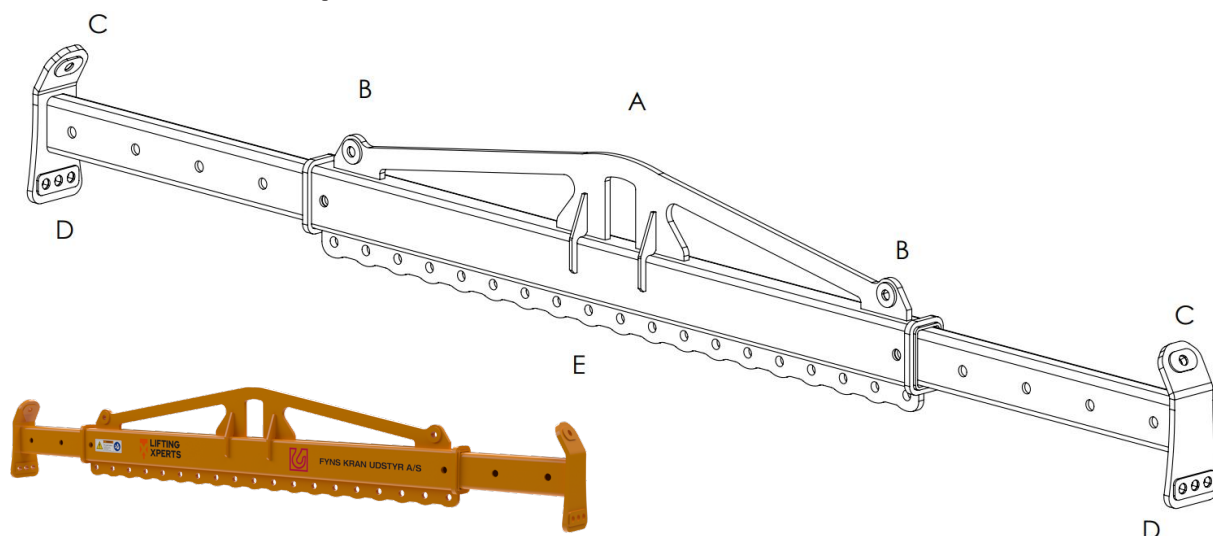

**LX S15 - WLL12/10T**


Løfteøje - Top	Løfteøje - Bund	Spredningsvinkel	Længde (mm)	WLL (kg)
A	D	-	2500	12.000
A	D	-	3000	10.000
A	D	-	3500	8.000
A	D	-	4000	7.000
A	D	-	4500	6.000
A	E	-	0-2500	12.000
B/B	D	Max. Spredningsvinkel 60°!	2500	12.000
B/B	D	Max. Spredningsvinkel 60°!	3000	10.000
B/B	D	Max. Spredningsvinkel 60°!	3500	8.000
B/B	D	Max. Spredningsvinkel 60°!	4000	7.000
B/B	D	Max. Spredningsvinkel 60°!	4500	6.000
B/B	E	Max. Spredningsvinkel 60°!	0-2500	12.000
C	D	Max. Spredningsvinkel 60°!	2500	12.000
C	D	Max. Spredningsvinkel 60°!	3000	12.000
C	D	Max. Spredningsvinkel 60°!	3500	12.000
C	D	Max. Spredningsvinkel 60°!	4000	10.000
C	D	Max. Spredningsvinkel 60°!	4500	10.000
C	E	N/A	N/A	N/A

Valgbare påsvejsede gravemaskinekroge har samme WLL som løfteåget.





LX S15 - WLL 18/12T

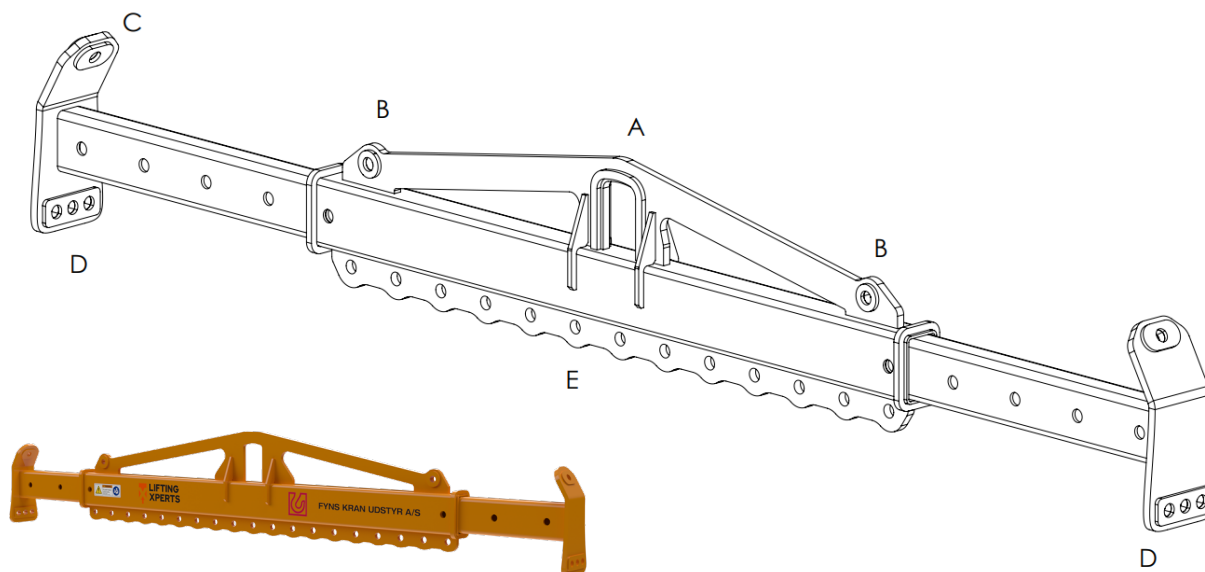

Løfteøje - Top	Løfteøje - Bund	Spredningsvinkel	Længde (mm)	WLL (kg)
A	D	-	2500	18.000
A	D	-	3000	15.000
A	D	-	3500	12.000
A	D	-	4000	10.000
A	D	-	4500	8.000
A	E	-	0-2500	18.000
B/B	D	Max. Spredningsvinkel 60°!	2500	18.000
B/B	D	Max. Spredningsvinkel 60°!	3000	15.000
B/B	D	Max. Spredningsvinkel 60°!	3500	12.000
B/B	D	Max. Spredningsvinkel 60°!	4000	10.000
B/B	D	Max. Spredningsvinkel 60°!	4500	8.000
B/B	E	Max. Spredningsvinkel 60°!	0-2500	18.000
C	D	Max. Spredningsvinkel 60°!	2500	18.000
C	D	Max. Spredningsvinkel 60°!	3000	18.000
C	D	Max. Spredningsvinkel 60°!	3500	15.000
C	D	Max. Spredningsvinkel 60°!	4000	15.000
C	D	Max. Spredningsvinkel 60°!	4500	12.000
C	E	N/A	N/A	N/A

Valgbare påsvejsede gravemaskinekroge har samme WLL som løfteåget.

