



Vantskruer

Leveres i fire udførelser. Leveres varmgalvaniserede.
Større dimensioner kan leveres. Sikkerhedsfaktor 5:1.
Tolerance +/- 5% på alle mål.

Turnbuckles


Available in four versions. Hot-galvanized.
Available in large dimensions. Safety factor 5:1.



Ovenstående version lagerføres.
The above version is kept in stock.

Varenr. / Item no.	Dim. mm	WLL tons/tonnes	Take up range (mm)	B mm	N mm	L mm	M mm	K mm	Vægt / Weight kg
261-400-1006	M6*	-	80	100	175	5	18	8	0,13
261-400-1008	M8*	-	85	110	210	6	25	9	0,25
261-400-1010	M10*	0,50	90	125	225	8	20	9,5	0,30
261-409-0012	M12*	0,70	155	195	315	10	30	13	0,66
261-400-1016	M16*	1,20	185	230	380	12	44	18	1,4
261-400-1020	M20	1,50	210	270	450	16	50	20	2,20
261-400-1022	M22	2,20	230	295	500	20	60	25	3,42
261-400-1024	M24	3,20	250	325	555	22	65	28	4,64
261-400-1032	1 1/4	4,80	290	370	680	28	85	38	8,84
261-400-1038	1 1/2	6,00	300	400	760	32	100	45	14,80
261-400-1044	1 3/4	8,50	290	400	760	38	105	50	21,00
261-400-1052	2	11,00	290	400	820	45	120	58	24,40

*Ikke godkendt til løft uden individuel test og mærkning.

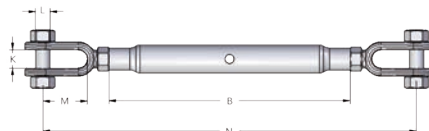

Kan leveres i fire udførelser.
Available in four versions.

