


Løkker

Links



B-løkker/Masterlinks

I hht. EN 1677-4/According to EN 1677-4

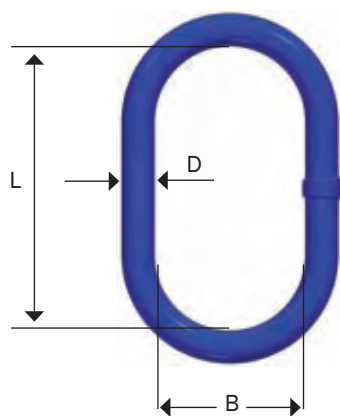


Varenr Item no.	Dim. Code	WLL 5:1 tonn	Mål i mm/dim mm			kg N.W.
			D	B	L	
0301002	13.B.5*	2,7	13	54	95	0,3
3	13.B.6*	2,7	13	60	115	0,4
4	16.B.6*	4,1	16	70	120	0,6
5	16.B.7	3,2	16	100	190	0,9
6	20.B.6*	6,7	20	82	150	1,1
7	20.B.7	6,5	20	90	170	1,3
8	22.B.6*	8,2	22	90	170	1,6
9	22.B.7	7,2	22	110	210	1,9
25	22.B.8	5,8	22	140	270	2,3
10	25.B.6*	10,7	25	103	190	2,3
11	28.B.6*	12,9	28	113,5	209	3,2
12	28.B.7	11,8	28	140	270	4
13	32.B.6*	17,1	32	140	270	5,3
14	38.B.6	28,1	38	140	270	7,5
15	38.B.7	19,1	38	220	420	11
16	45.B.6	38,3	45	170	320	12,5
17	45.B.7	27,6	45	250	470	16,5
18	50.B.6	45	50	200	380	18
19	60.B.6	65,3	60	220	430	30
20	70.B.6	84,4	70	250	500	44



European standard
EN 1677-4

* Tilpasset Omegaløkker * Fits Omega

A-løkker/A-links

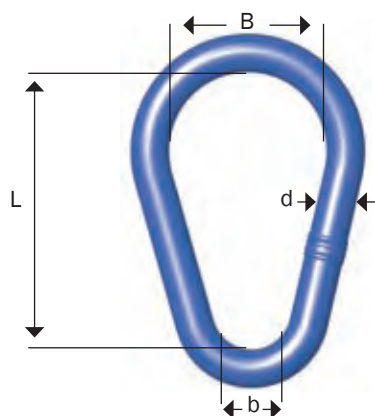

Varenr Item no.	Dim. Code	WLL 4:1 tonn	Mål i mm/dim mm				kg N.W.
			d	b	B	L	
0301201	13.A.6	2,4	13	30	60	120	0,4
2	16.A.6	3,8	16	35	70	130	0,6
3	20.A.7	5,8	20	45	90	180	1,3
4	22.A.6	7,6	22	45	90	180	1,6
5	25.A.6	10	25	50	100	200	2,3
6	28.A.6	12,7	28	55	110	220	3,2
7	32.A.6	15,2	32	70	140	285	5,3
8	38.A.6	25	38	70	140	285	7,6
9	45.A.6	34	45	85	170	340	12,5
10	50.A.6	40	50	100	200	400	18,0